



# MYSTIK® JT-6® HEAVY DUTY SYNBLEND 460 #2 GREASE

A NEW WAY TO  
DOMINATE WITH  
MYSTIK PRODUCTS.



**Mystik**  
LUBRICANTS







## MYSTIK JT-6 HEAVY DUTY SYNBLEND 460 #2 GREASE


Mystik® JT-6® Heavy Duty SynBlend 460 #2 Grease is a specially-formulated, NLGI #2 high performance grease surpassing industry and market demands for a wide variety of applications.

### Features

- Maximum wear protection and heavy load-carrying capacity (See Figure 1)
- Broad operating temperature range of -5°F to 350°F (See Figure 2)
- Proprietary stay-in-place formula helps extend service life (See Figure 3)
- Water resistant; protects against corrosion (See Figures 3, 4 and 5)

### Cost Saving Benefits

- Extends service life (up to 3X)
- Use less grease
- Reduce maintenance
- Minimize downtime
- Reduces inventory as a single-solution grease
- One grease to lubricate chassis and fifth wheels
- Minimizes misapplication






## MYSTIK JT-6 HEAVY DUTY SYNBLEND 460 #2 GREASE VS. THE LEADING COMPETITORS

Mystik JT-6 Heavy Duty SynBlend 460 #2 Grease
  Competitor A
  Competitor B
  Competitor C


Extreme Pressure Test, Figure 1

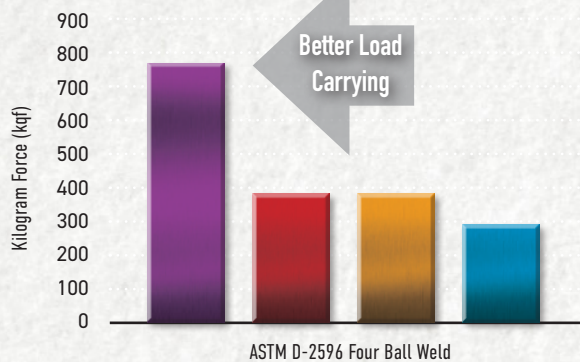

Mystik JT-6 Heavy Duty SynBlend 460 #2 Grease can carry twice the load of the competitor's grease.

Water Spray-Off Test, Figure 3


Inverse Graph ASTM D-4049\*

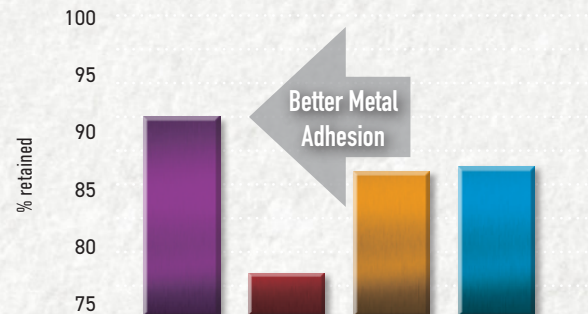

Mystik JT-6 Heavy Duty SynBlend 460 #2 Grease has better water spray-off resistance than leading competitors which means the grease stays-in-place even when exposed to direct water spray. This helps to prevent dry spots that can lead to rust and corrosion while also providing extended service capabilities.

## PERFORMANCE


Mobility Test, Figure 2

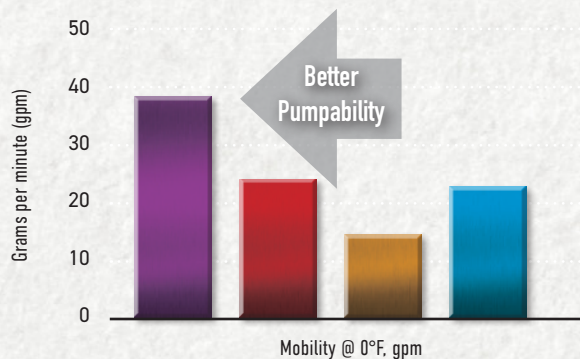

Mystik JT-6 Heavy Duty SynBlend 460 #2 Grease has a unique synthetic blend formula that provides better mobility and pumpability than leading competitors without compromising its ability to stay in place.

Water Washout Test, Figure 4

Inverse Graph ASTM D-1264\*

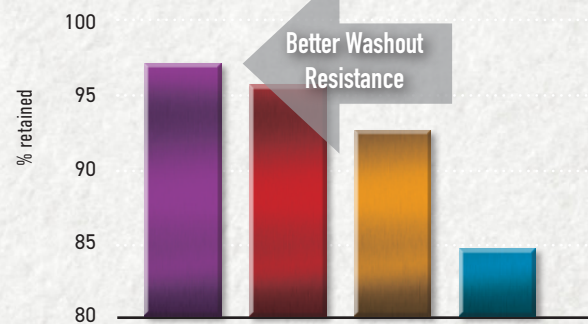

Mystik JT-6 Heavy Duty SynBlend 460 #2 Grease has the highest washout resistance compared to leading competitors which means the grease resists the effects of water, prevents failure and increases service life.

Corrosion Test, Figure 5

Freshwater Corrosion	✓	✓	✓	✓
Saltwater Corrosion	✓	✓	-	-

\* Figure 3 and 4 show an inverse of the ASTM D-4049 Water Spray-Off Test and the ASTM D-1264 Water Washout Test. For example, in Figure 4 Mystik JT-6 Heavy Duty SynBlend 460 #2 Grease only lost 8 percent of the grease during direct water spray and retained 92 percent. While the test measures percent lost, the graph shows an inverse as percent retained.



## Convenient On-the-Go 10-oz. Squeeze Tube for Fifth Wheels



- No-mess portable, re-sealable squeeze tube for on the road
- No grease gun required for application
- No grease pouch left behind



## WHY CHOOSE US



Optimized formula provides superior performance properties over a wide operating range (-5 to 350F), for a variety of weather conditions and application temperatures.



Proven to stay-in-place on the fifth wheel, preventing exposure to road grime and salt; exhibiting no signs of rust or dry spots when properly applied



Technical support from the Mystik team of industry-leading, grease technology experts

## Common Applications

- Heavy Duty Trucks (local, regional and long haul)
- Extreme Hauling Trucks
- Agricultural Equipment
- Off-highway/Construction Equipment
- Buses, Recreational Vehicles & Trailers
- Slides, Gooseneck Equipment Trailers

## Common Lubrication Points

- |                         |                                 |                          |                                     |
|-------------------------|---------------------------------|--------------------------|-------------------------------------|
| • Ball Joints           | • Kingpins                      | • Slip Joint             | • Throw-out Bearing and Clutch Fork |
| • Bell Crank            | • Power Steering Box            | • Steering Gear          | • Tie Rod Ends                      |
| • Drag Link             | • Shackle Pins                  | • Steering Shaft         | • Trans Cross Shaft Release Fork    |
| • Fifth Wheel           | • Slack Adjusters               | • U-Joints & Slip Spline | • U-joints                          |
| • Hood Hinges           | • Slides and Locking Mechanisms | • Support Bushings       |                                     |
| • Interaxle Drive Shaft |                                 |                          |                                     |

## Material Codes & Packaging Options:

- |                                   |  |
|-----------------------------------|--|
| • 665087002020 400-lb. Lined Drum | • 665087002080 50/14-oz. Tube Case         |
| • 665087002072 120-lb. Lined Keg  | • 665087002068 12/10-oz. Squeeze Tube Case |
| • 665087002044 35-lb. Pail        |  |

For additional information, contact the CITGO Product Answer Line 1-800-248-4684.

[WWW.MYSTIKLUBES.COM](http://WWW.MYSTIKLUBES.COM)